

Heat Sleeves & Heat Wrap

Heat sleeves or heat wrap could reduce the outside temperature of a bare pipe by up to 300°F to 400°F.

Heat Sleeves

Slips onto 3" to 5" dia. pipe




NEW

Length	Part Number
12"	P235764
18"	P235765
24"	P235766

Heat Wrap

2" wide roll, easy to install on any pipe

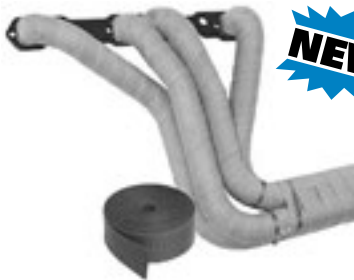

NEW

Length	Part Number
2"X50' (600") Roll	P235767

Sleeve & Wrap Clamps

Wrap clamps make installation easy!
No tools needed.



NEW

Length	Part Number
2 PC of 18" Long Clamp	P235768
12 PC of 18" Long Clamp	P235769

ACCESSORIES

Flex Tubing & Cut to Length Flex

Flex Tubing


- Flex tubing (and cut lengths) should be installed in a half extended state. Donaldson flex tubing ships in the half extended state.
- Material thickness for stainless and galvanized is 0.015"
- Sized by flex I.D.
- Material thickness

Flex Tubing

--- I.D. --- in	mm	10 ft. (3 m) Lengths		25 ft. (7.6 m) Lengths ¹	
		Stainless	Galvanized	Stainless	Galvanized
2.00	51	P226151	P226148		
2.50	64	P226152	P226149		
3.00	76	P226144	P226140	P226132	P226129
3.50	89	P226145	P226141	P226133	P226154
4.00	102	P226146	P226142	P226156 ²	P226155 ²
5.00	127	P226147	P226143	P226158 ²	P226157 ²
6.00	152	P226153 ¹	P226150 ¹		

1 - Size exceeds shipping limits by North American small package carriers. This item must ship by truck.

2 - Shipped on pallet, product is not boxed.

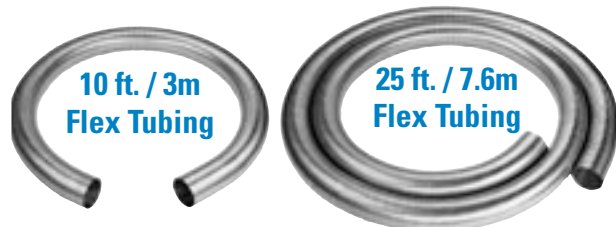

Cutting & Installation Instructions for Flex Tubing - Please see page 168

Standard Cut to Length Flex



- Deburred ends
- Sized by flex I.D.
- Stainless and galvanized material thickness - 0.015"
- Measured fully extended



Close-up of deburred edge

Standard Cut to Length Flex

--- I.D. ---		Overall Length		Stainless	Galvanized
in	mm	in	mm		
3.00	76	12.00	305	J240003	
		18.00	457	P206552	
		24.00	610	J240004	
3.50	89	12.00	305	J240005	
		18.00	457	P206553	
		24.00	610	J024850	
4.00	102	12.00	305	J240006	P224479
		18.00	457	P206554	J024754
		24.00	610	J024836	J024835
		36.00	914	J034673	J034743
		5.00	127	12.00	305
5.00	127	18.00	457	P206555	J024755
		24.00	610	J024838	J024837
		36.00	914	J034674	J034744
6.00	152	18.00	457	P206556	
		30.00	762	P206559	

Flex Cut Lengths with Finished Ends



- Flex tubing (and cut lengths) should be installed in a half extended state. Donaldson flex tubing ships in the half extended state.
- One end O.D., one end I.D. slotted
- Sized by flex I.D.
- Overall length includes finished ends
- Welded tube ends

Cut-to-Length Flex - Finished Ends

--- I.D. ---		Overall Length		Galvanized
in	mm	in	mm	
3.00	76	18.00	457	P206544
4.00	102	18.00	457	P206546
5.00	127	18.00	457	P206547

Long-Life Cut to Length Flex



- Improved flexibility
- Consistent product quality—optimized material choice/consistency
- Heavier gauge stainless material over standard flex (0.018" gauge)
- Up to 8 times longer life than conventional flex
- Less leakage and lower emissions during truck start up
- Simplified installation—installation strip and flow direction
- Ends square cut and deburred
- Installation length indicator
- 12 month/120,000 mile/200,000 km warranty (on-highway vehicles only)

Donaldson patented technology

Long-Life Flex

--- I.D. ---		Mid Length ¹		Stainless
in	mm	in	mm	
4.00	102	12.00	305	P224412
		15.00	381	P224415
		18.00	457	P224418
5.00	127	21.00	533	P224421
		15.00	381	P224515
		18.00	457	P224518
		21.00	533	P224521

¹ - Length measured in half compressed state

Recommended clamps:

Preformed SealClamp or Offset MaxGrip Bent Bolt